

# SERIES 9500


## Interior/Exterior Flat Acrylic Water Base Paint

### General Information

An interior/exterior flat acrylic water base paint for use over new or sound, previously painted drywall, plaster, masonry, brick, properly primed metal, and properly primed wood.

### Ideal Uses

For remodels, custom homes, and commercial re-paints.

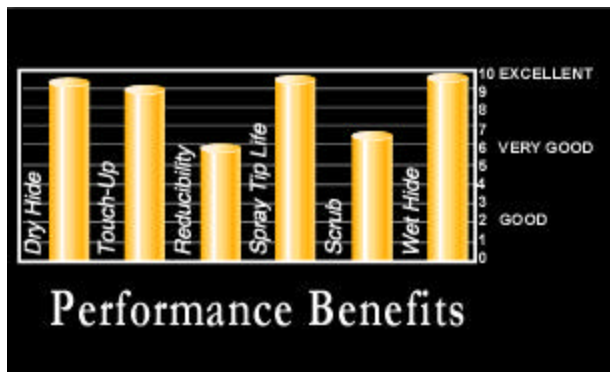

- **Excellent Dry Hide**
- **Great One Coat Coverage**
- **Good Scrub**
- **Superior Touch-Up**

### Surface Preparation

All surfaces must be clean, dry and free from dirt, wax, grease, oil, chalk, mildew and loose or peeling paint. Nail holes, cracks or other surface imperfections should be properly filled, sanded smooth and dusted clean. For best adhesion, glossy surfaces should be lightly sanded. For new surfaces, apply appropriate primer. Always wear an approved and properly fitted NIOSH/MSHA dust mask or respirator when sanding and during application. All mold, mildew, and fungi must be completely and thoroughly removed. Remove by washing with a commercially available mildew wash or a mixture of 1 cup TSP, one quart household bleach and three quarts water. Wear appropriate protective equipment such as rubber gloves, goggles, and other protective clothing when handling mildew wash or bleach solutions. *Rinse thoroughly with fresh water.*

### Application Suggestions

**IMPORTANT! READ BEFORE APPLICATION! STIR WELL BEFORE USING. PROTECT FROM FREEZING.** Apply only when temperature of the surface, air and material is above 50°F. If more than one package of the same color is to be used, mix together before applying to ensure uniform color and finish. Apply paint to a small test area on surface for color approval **BEFORE** painting entire surface. May be applied by polyester or nylon brush, medium nap synthetic roller, airless spray (.015-.019 tip), or HVLP. When spraying, follow spray equipment manufacturer's recommendations carefully.

### Suggested Primers

**Interior drywall, plaster or masonry** - P001 Interior P.V.A. Primer/Sealer or P002 Interior Enamel Undercoater.

**Bare interior wood, particle board or Masonite** – P003 interior Alkyd Oil Base Enamel Undercoat.

**Exterior masonry or brick** – P006 exterior 100% Acrylic Water Base All Purpose Primer or P007 exterior 100% Acrylic Water Base Stain Blocking Primer.

**Exterior wood** – P007 exterior 100% Acrylic Water Base Stain Blocking Primer or P009 Alkyd Oil Base Stain Stopping Primer.

**Metal** – P9444 Interior/Exterior Alkyd Oil Base Red Oxide Metal Primer.

### Technical Information

**Sheen:** Flat, 0-5% @ 85°

### Application Tools:

Brush Type: Quality Polyester or Nylon  
 Roller Cover: Medium Nap Synthetic  
 Spray Equipment: Airless (.015-.019 tip) or HVLP  
 Follow spray equipment manufacturer's recommendations carefully.

### Coverage:

Approximately 300-400 sq.ft. per gallon depending on surface texture and porosity.

### Average Film Thickness:

When wet: 4.6 mils  
 When dry: 1.6 mils

### Dry Time:

Dries in 30 minutes to 1 hour depending on temperature, humidity, surface texture and film thickness. Allow to dry at least 4 hours before recoating.

### Thinning:

Apply at package consistency. If necessary, add no more than ½ pint of water per gallon. **DO NOT USE PAINT THINNER.**

### Clean Up:

Clean brushes, rollers, equipment, spills and spatters with soap and warm water. Clean spills and spatters immediately.

**Weight per gallon:** 10.91 lbs

### Content Analysis:

Solids by volume: 35.49%  
 Solids by weight: 50.75%

### V.O.C.:

Contains less than 100 g/l V.O.C.

### Health, Safety and Environmental Information:

**CAUTION!** Do not take internally. Use only with adequate ventilation. Avoid breathing vapor, spray mist or sanding dust. Sanding dust may cause eye and skin irritation. Avoid contact with eyes. Avoid prolonged or repeated contact with skin. Formulated without lead, mercury or chromium.

*This product contains chemical(s) known to the State of California to cause cancer and birth defects or other reproductive harm (Prop. 65).*

### Warranty:

Smiland Paint Company warrants satisfaction when this product is applied according to label instructions. If not satisfied after following application guidelines, contact the manufacturer or return sales receipt and unused portion of the product to place of purchase. The customer will receive a refund for the purchase price of the product, or a product of equal value. No other warranties are expressed or implied.